


**No. SP
PETROLEUM DROP HOSE**

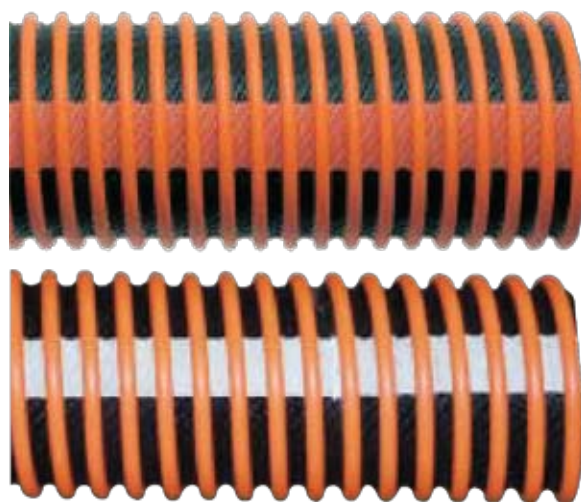

Part Number	Inside Diameter	Outside Diameter	Bend Radius	Weight LB/FT	Working Pressure-PSI
SP-101-200	2"	2-7/8"	4"	1.08	100
SP-101-300	3"	3-7/8"	6"	1.49	100
SP-101-400	4"	4-7/8"	8"	2.11	100
SP-101-600	6"	7"	12"	3.20	100
SP-102-200	2"	2-7/8"	4"	1.08	100
SP-102-300	3"	3-7/8"	6"	1.49	100
SP-102-400	4"	4-7/8"	8"	2.11	100
SP-102-600	6"	7"	12"	3.20	100

Description: Ultra-lightweight flexible petroleum drop hose. Seamless static dissipating tube. This unique construction combines rubber and PVC to provide excellent vacuum capabilities and abrasion resistance. All-weather product is available with static wire for added protection (SP-102) or without (SP-101) static wire. Premium grade cover with external PVC helix provides superior oil, ozone, and abrasion resistance.

Tube: Seamless black nitrile, static conductive. Resistant to up to 60% Aromatics.

Reinforcement: Multiple plies of synthetic fabric, supported by a PVC helix.

Cover: One piece nitrile blend.

Temperature: -40°F to +150°F.