

No. 555 - WIRE INSERTED NON-ASBESTOS SHEET WITH NBR BINDER



Description: A compressed non-asbestos sheet gasket produced from aramid and synthetic fibers reinforced with a woven wire mesh and bonded with NBR. Recommended for sealing applications where temperature and pressure fluctuate.

Service: Saturated steam, water, brine, mild acids, alkalis, oils, solvents, and refrigerants.

Temperature Limit: -40°F to 720°F.


Pressure Limit: 1450 PSI.

Length: 59" x 63", Larger sizes available upon request.

Available with or without graphite on both sides.

Part #	Size
555-132	1/32"
555-116	1/16"
555-332	3/32"
555-180	1/8"

No. 850 - COMPRESSED CARBON FIBER SHEET WITH NBR BINDER

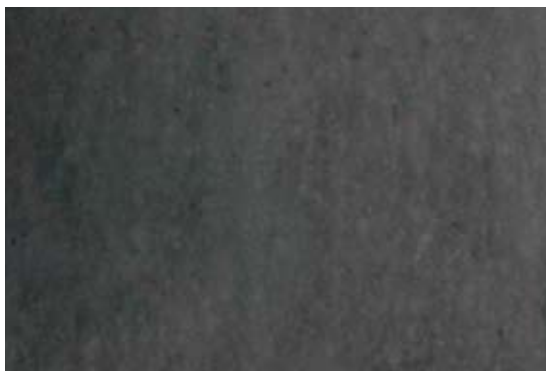

Description: A compressed non-asbestos sheet gasket produced from carbon and graphite bonded with NBR

Service: Saturated steam, water, brine, mild acids, alkalis, air, oils, solvents, and refrigerants.

Temperature Limit: -40°F to 840°F.

Pressure Limit: 1900 PSI.

Length: 59" x 63", Larger sizes available upon request.

Part #	Size
850-164	1/64"
850-132	1/32"
850-116	1/16"
850-332	3/32"
850-180	1/8"